





All weather protection systems!

RETRACTABLE


AWNINGS.COM

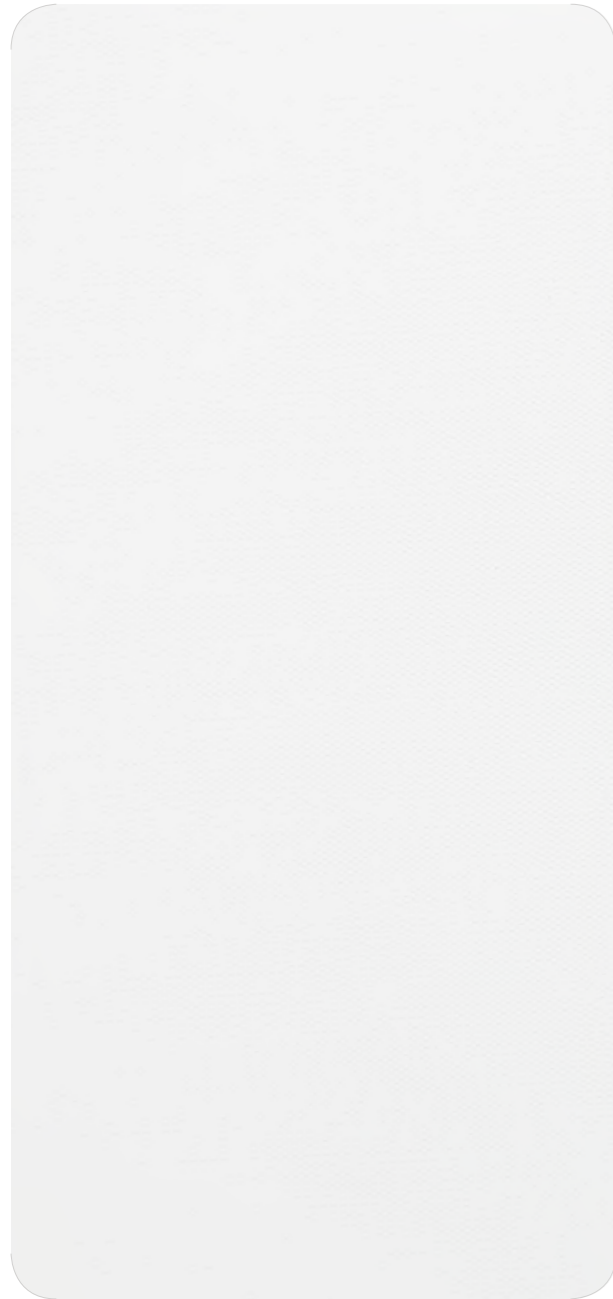

PW213/White



PC211/Cream

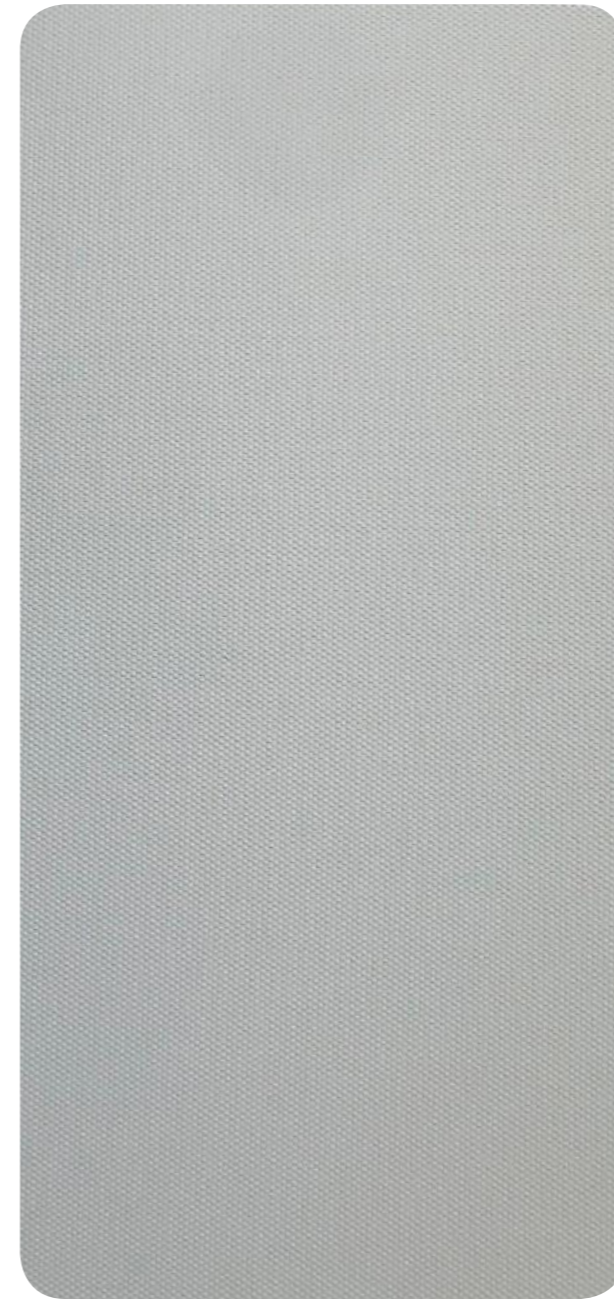

PG209/Grey

Premium fabric serie is produced from black-out PVC and 5 years warranty. Cover is water & light proof and flame retardant.



UV Resistant



No Pockets or Bubbles




Flame Retardant




5 Years Guarantee




Thermal Comfort




Dimensional Stability



Tear Resistance

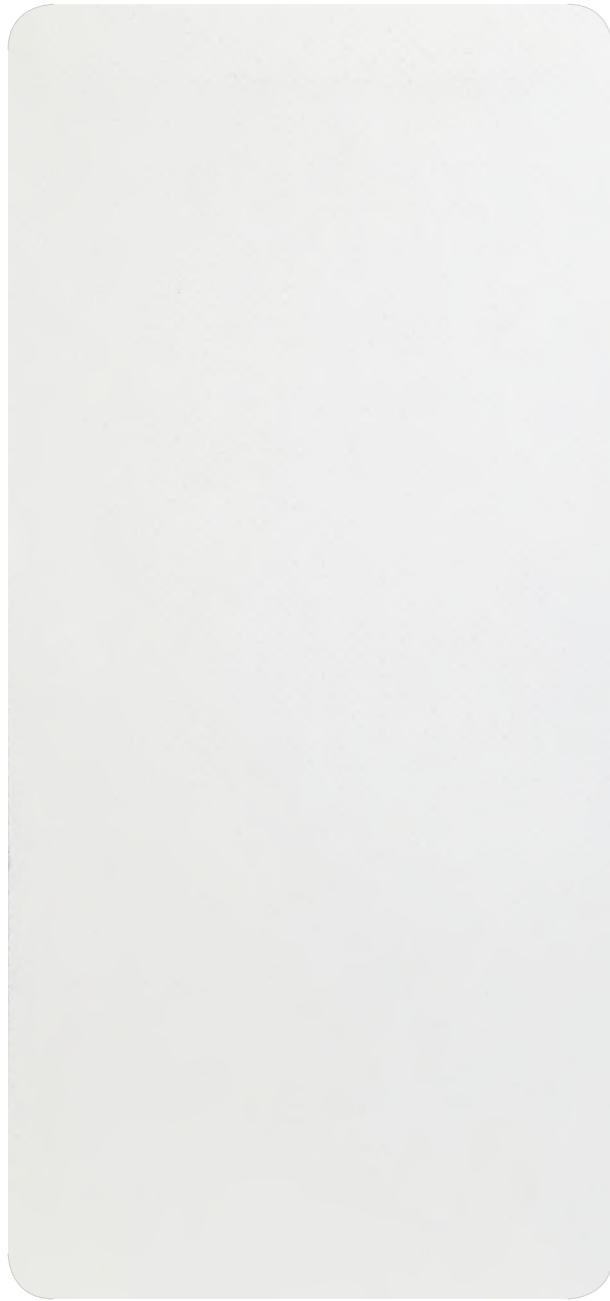

WT785/White

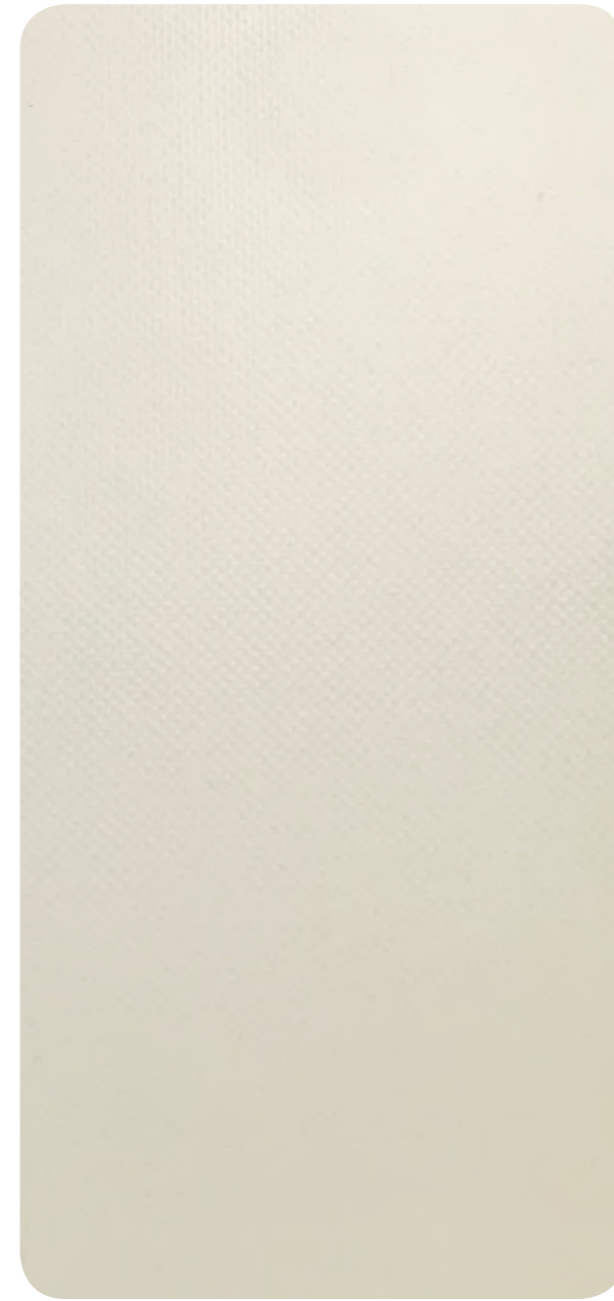

CR295/Cream

Basic fabric serie is produced from black-out PVC and 5 years warranty. Cover is water & light proof and flame retardant.



UV Resistant



No Pockets
or Bubbles




Flame
Retardant




5 Years
Guarantee




Thermal
Comfort



Dimensional
Stability



Tear
Resistance

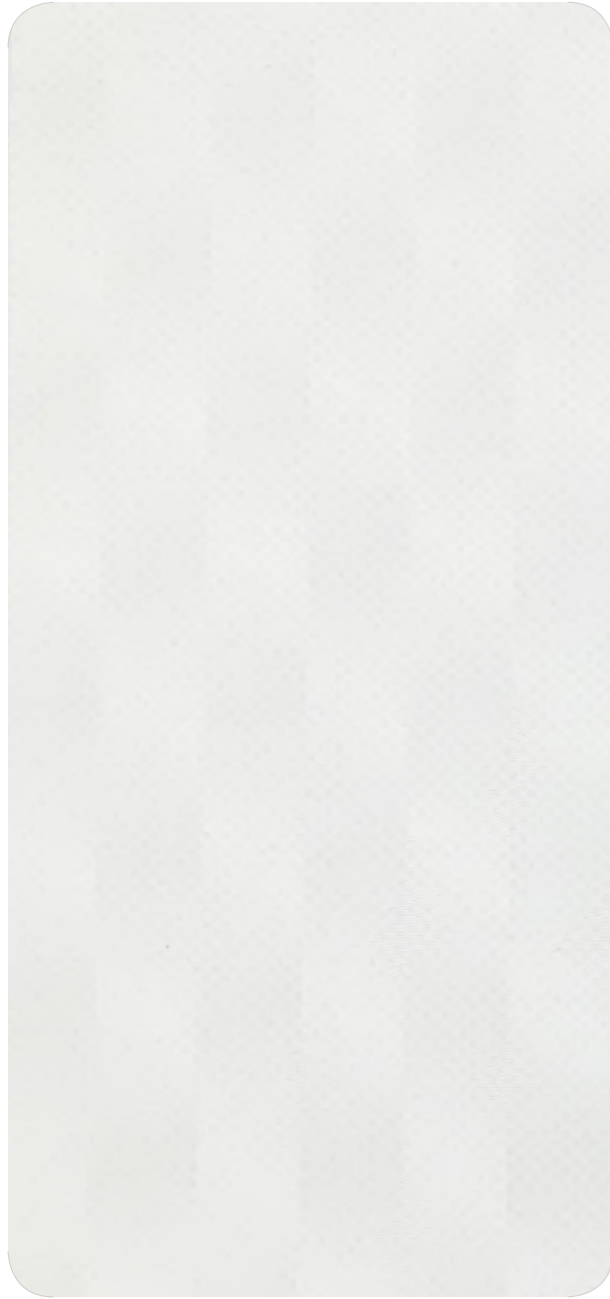

WTEX/White



CRMX/Cream



GRYX/Grey

Xclusive fabric serie is produced from black-out PVC and 5 years warranty. Cover is water & light proof and flame retardant.



UV Resistant



No Pockets
or Bubbles




Flame
Retardant




5
years
guarantee




Thermal
Comfort




Dimensional
Stability



Tear
Resistance

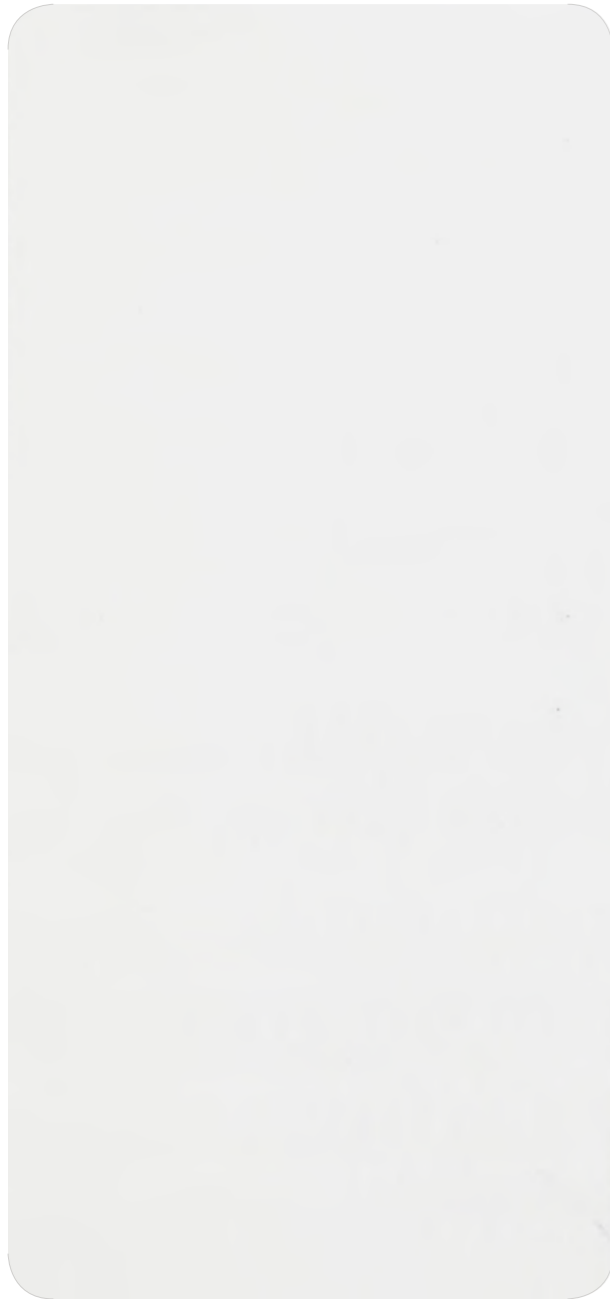

MW23/White

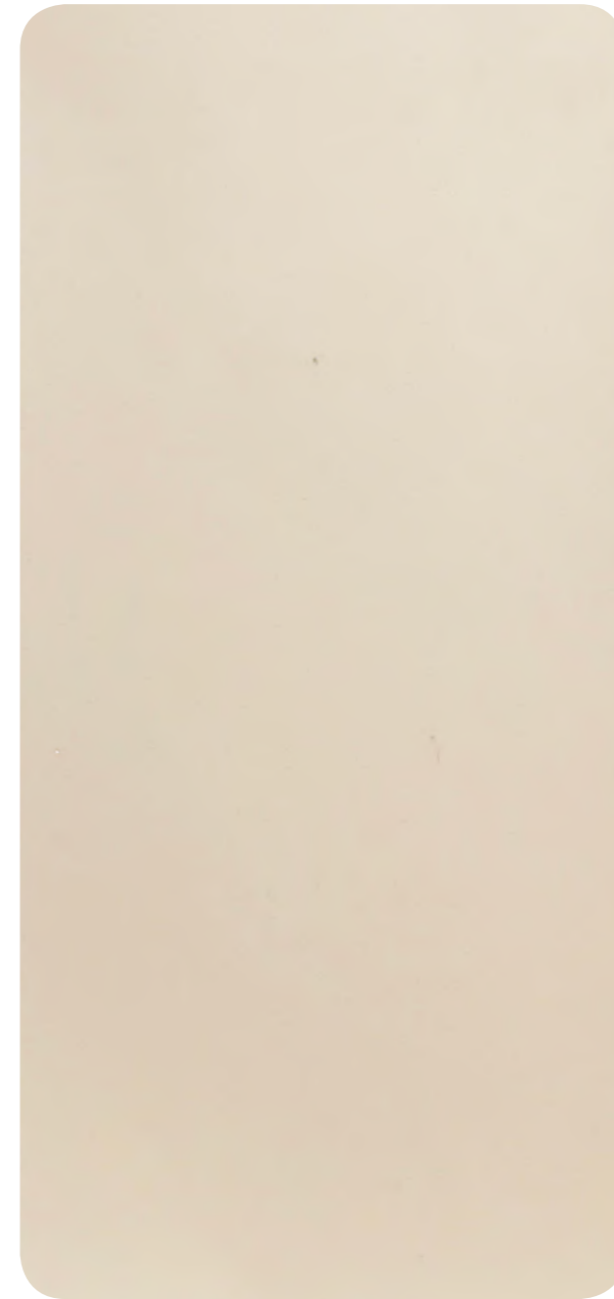

MC26/Cappuccino

Matt fabric serie is produced from black-out PVC and 5 years warranty. Cover is water & light proof and flame retardant.



UV Resistant



No Pockets
or Bubbles




Flame
Retardant




5 Years
Guarantee




Thermal
Comfort



Dimensional
Stability




Tear
Resistance

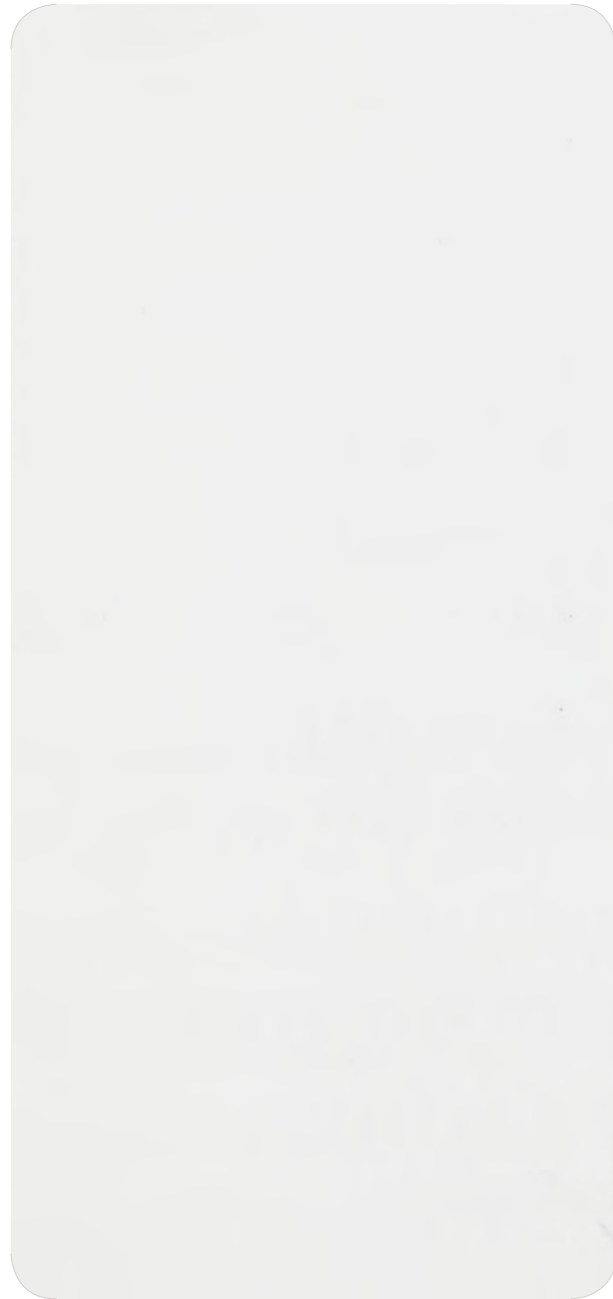

LW22/White



LCR33/Cream

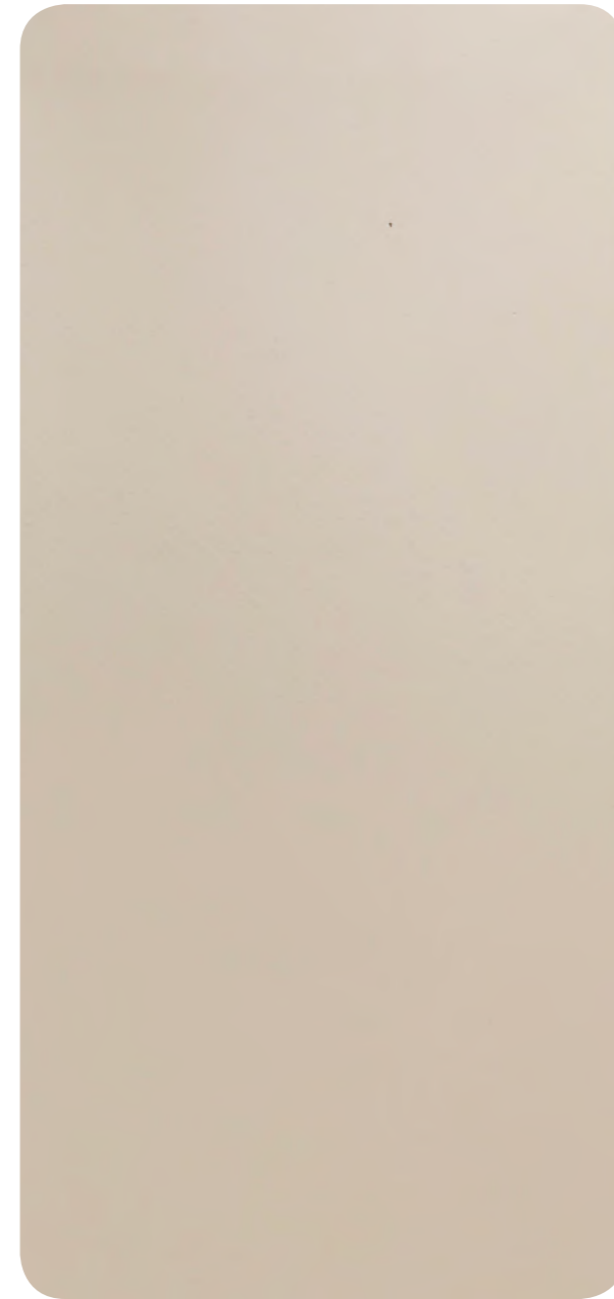

LC44/Cappuccino



LG66/Grey

Matt fabric serie is produced from black-out PVC and 5 years warranty. Cover is water & light proof and flame retardant. Available only with 'Linear Fabric Dimmer Led' option.



UV Resistant



No Pockets or Bubbles




Flame Retardant




5 Years Guarantee



Thermal Comfort



Dimensional Stability



Tear Resistance



STRW22/White



STRB33/Black

Semi-transparent fabric serie is produced from PVC and 5 years warranty. Cover is waterproof and flame retardant.



UV Resistant



No Pockets
or Bubbles




Flame
Retardant




5 Years
Guarantee



Thermal
Comfort



Dimensional
Stability



Tear
Resistance

specifications

premium

Technical Specifications/ Teknik Özellikler	Unit/Birim	Numbers/ Değerler
Weight/Ağırlık	g/m ²	730
Thickness/Kalınlık	mm	0.55
Warp/Weft Tensile Strenght/ Çözü/Atkı Gerilme Dayanımı	N/50 mm	2500/2500
Warp/Weft Tearing Strenght/ Çözü/Atkı Yırtılma Dayanımı	N	200/200
Flame Retardant/ Alev Geciktirme		B1/DIN 4102-1
Cold Resistance/ Soğuk Dayanımı	°C	-30
Heat Resistance/ Sıcak Dayanımı	°C	+70

basic

Technical Specifications/ Teknik Özellikler	Unit/Birim	Numbers/ Değerler
Weight/Ağırlık	g/m ²	800
Thickness/Kalınlık	mm	0.7
Warp/Weft Tensile Strenght/ Çözü/Atkı Gerilme Dayanımı	N/50mm	3500/3500
Warp/Weft Tearing Strenght/ Çözü/Atkı Yırtılma Dayanımı	N	350/350
Flame Retardant/ Alev Geciktirme		B1/DIN 4102
Cold Resistance/ Soğuk Dayanımı	°C	-40
Heat Resistance/ Sıcak Dayanımı	°C	+70

matt / linear fabric dimmer led

Technical Specifications/ Teknik Özellikler	Unit/Birim	Numbers/ Değerler
Weight/Ağırlık	g/m ²	1150
Thickness/Kalınlık	mm	1,05
Warp/Weft Tensile Strenght/ Çözü/Atkı Gerilme Dayanımı	N/50 mm	7000 / 6500
Warp/Weft Tearing Strenght/ Çözü/Atkı Yırtılma Dayanımı	N	1000/1000
Flame Retardant/ Alev Geciktirme		B1/DIN 4102
Cold Resistance/ Soğuk Dayanımı	°C	-30
Heat Resistance/ Sıcak Dayanımı	°C	+70

semi-transparent

Technical Specifications/ Teknik Özellikler	Unit/Birim	Numbers/ Değerler
Weight/Ağırlık	g/m ²	600
Thickness/Kalınlık	mm	0.55
Warp/Weft Tensile Strenght/ Çözü/Atkı Gerilme Dayanımı	N/50 mm	2300/2300
Warp/Weft Tearing Strenght/ Çözü/Atkı Yırtılma Dayanımı	N	220/220
Flame Retardant/ Alev Geciktirme		B1/DIN 4102
Cold Resistance/ Soğuk Dayanımı	°C	-25
Heat Resistance/ Sıcak Dayanımı	°C	+70

xclusive

Technical Specifications/ Teknik Özellikler	Unit/Birim	Numbers/ Değerler
Weight/Ağırlık	g/m ²	850
Thickness/Kalınlık	mm	0.7
Warp/Weft Tensile Strenght/ Çözü/Atkı Gerilme Dayanımı	N/50mm	3000/3000
Warp/Weft Tearing Strenght/ Çözü/Atkı Yırtılma Dayanımı	N	300/300
Flame Retardant/ Alev Geciktirme		B1/DIN 4102
Cold Resistance/ Soğuk Dayanımı	°C	-40
Heat Resistance/ Sıcak Dayanımı	°C	+70


matt

Technical Specifications/ Teknik Özellikler	Unit/Birim	Numbers/ Değerler
Weight/Ağırlık	g/m ²	800
Thickness/Kalınlık	mm	0.7
Warp/Weft Tensile Strenght/ Çözü/Atkı Gerilme Dayanımı	N/50 mm	3000/3000
Warp/Weft Tearing Strenght/ Çözü/Atkı Yırtılma Dayanımı	N	300/300
Flame Retardant/ Alev Geciktirme		B1/DIN 4102
Cold Resistance/ Soğuk Dayanımı	°C	-40
Heat Resistance/ Sıcak Dayanımı	°C	+70




All weather protection systems!

RETRACTABLE
AWNINGS.COM

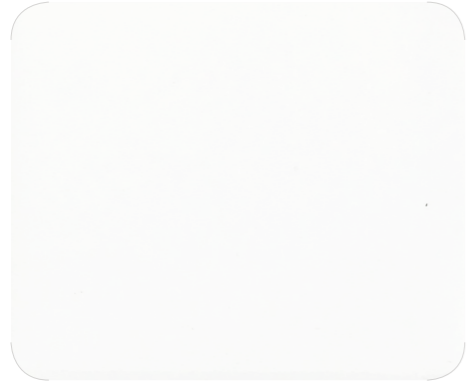

RAL 9016

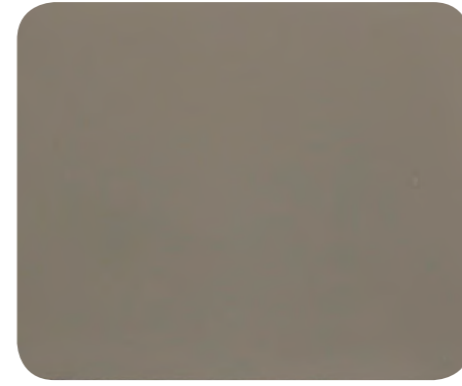


RAL 7006




RAL 1013



RAL 7016

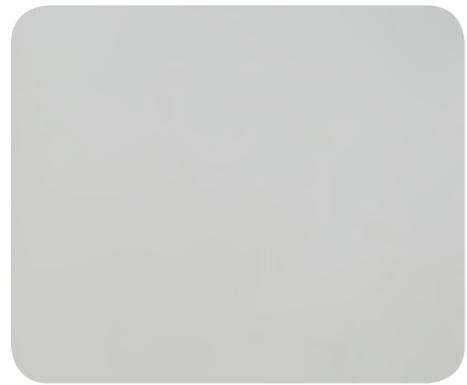

RAL 9006

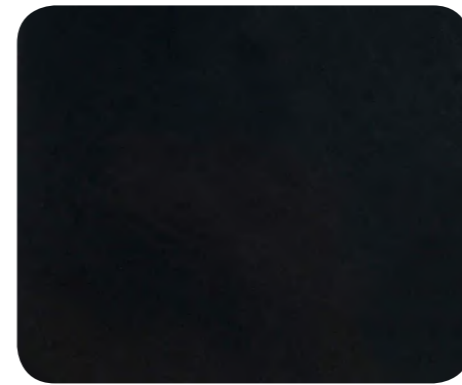

RAL 9005

The color and gloss level shown in this color swatch should be used only as guide.



OGN35



OGN39



OS561



ON617




OY395



ON611

The color and gloss level shown in this color swatch should be used only as guide.

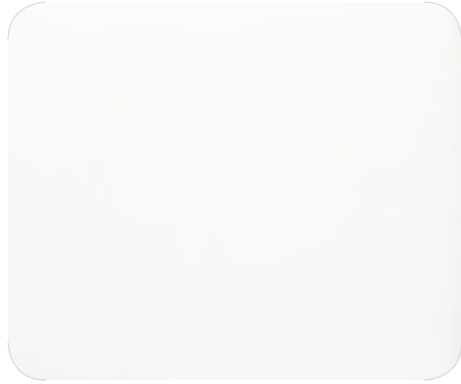

ST9010



ST7039



ST9001



ST7016



ST1013



ST8019

The color and gloss level shown in this color swatch should be used only as guide.