

KAYSERI




Technical information, specifications & dimensions

All weather protection systems!

RETRACTABLE
AWNINGS.COM

Tel (305) 628-2424
Tel (866) 438-2964
Email: info@retractableawnings.com

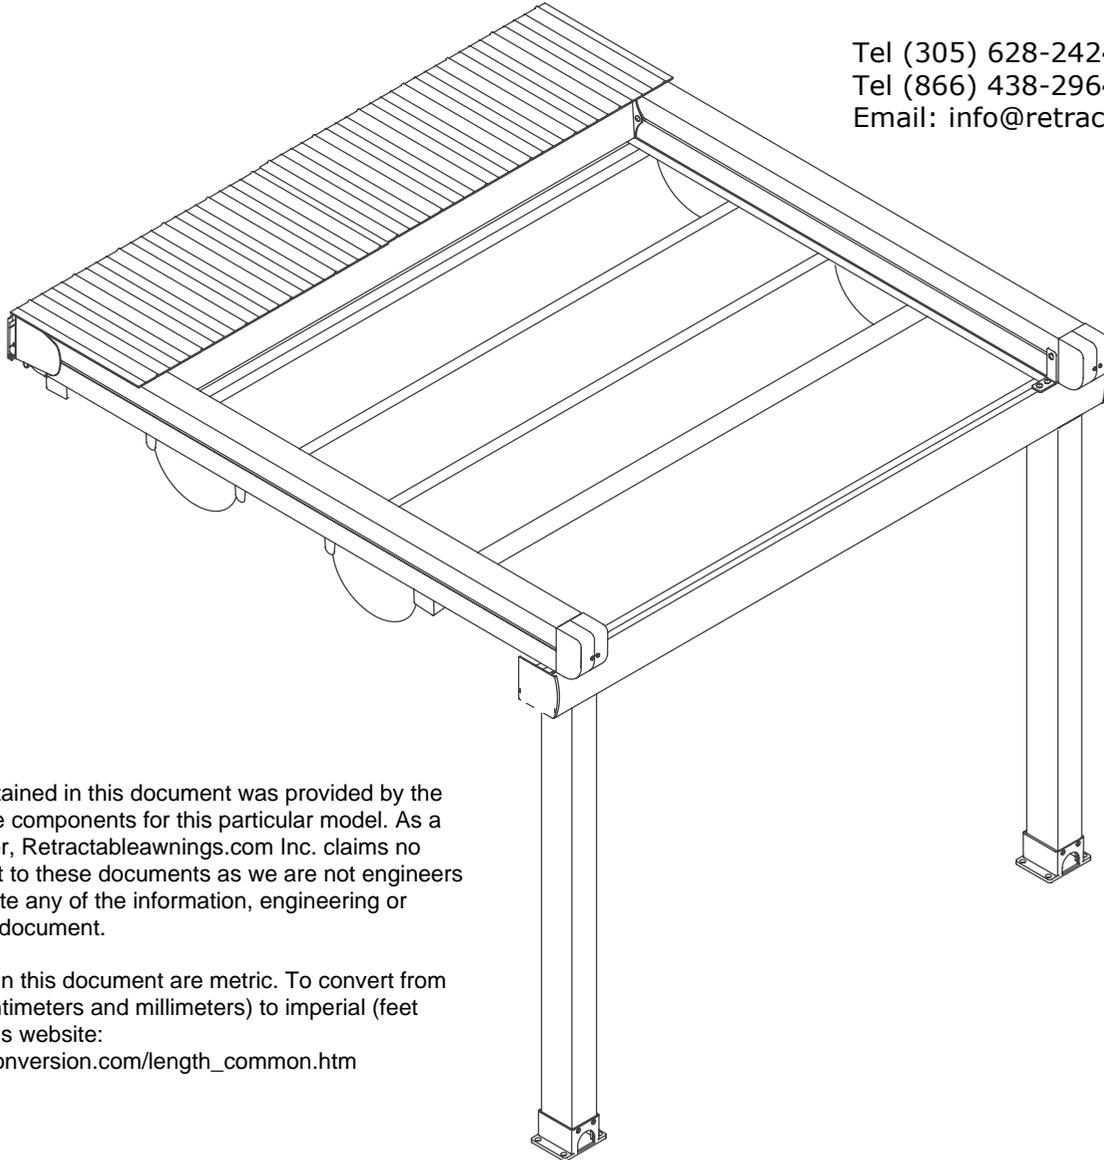


All information contained in this document was provided by the manufacturer of the components for this particular model. As a fabricator/distributor, Retractableawnings.com Inc. claims no liability with respect to these documents as we are not engineers and did not complete any of the information, engineering or calculations in this document.

All measurements in this document are metric. To convert from metric (meters, centimeters and millimeters) to imperial (feet and inches) visit this website:
http://www.onlineconversion.com/length_common.htm

One Side


One Module

200 cm > 350 cm
One Module with one motor & 2 rafters

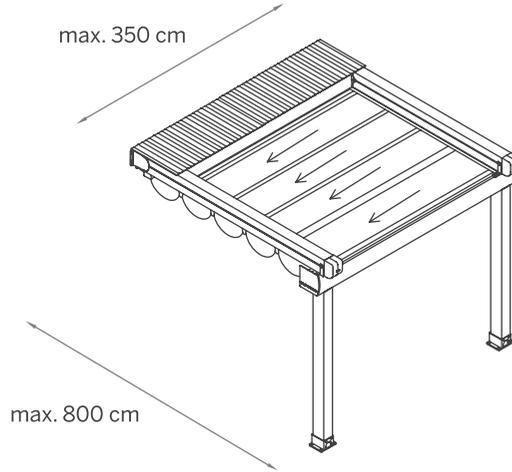


Two Modules

350 cm > 700 cm
Two Modules with one motor & 3 rafters

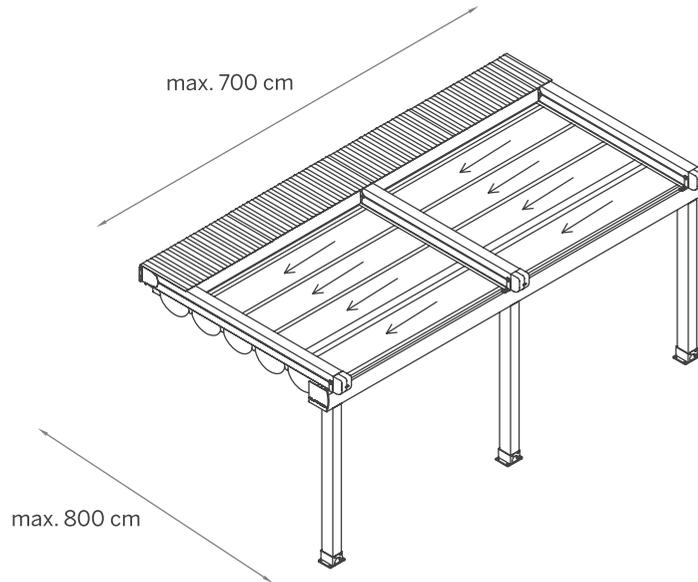


Three Modules

700 cm > 1050 cm
Three Modules with one motor & 4 rafters

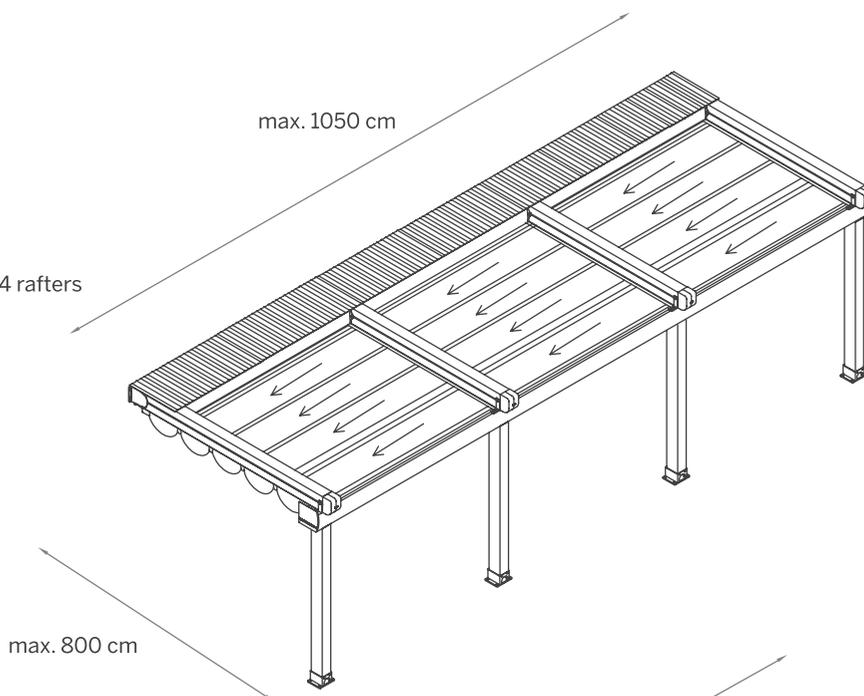**Four Modules**


1050 cm > 1300 cm
Four Modules with one motor & 5 rafters

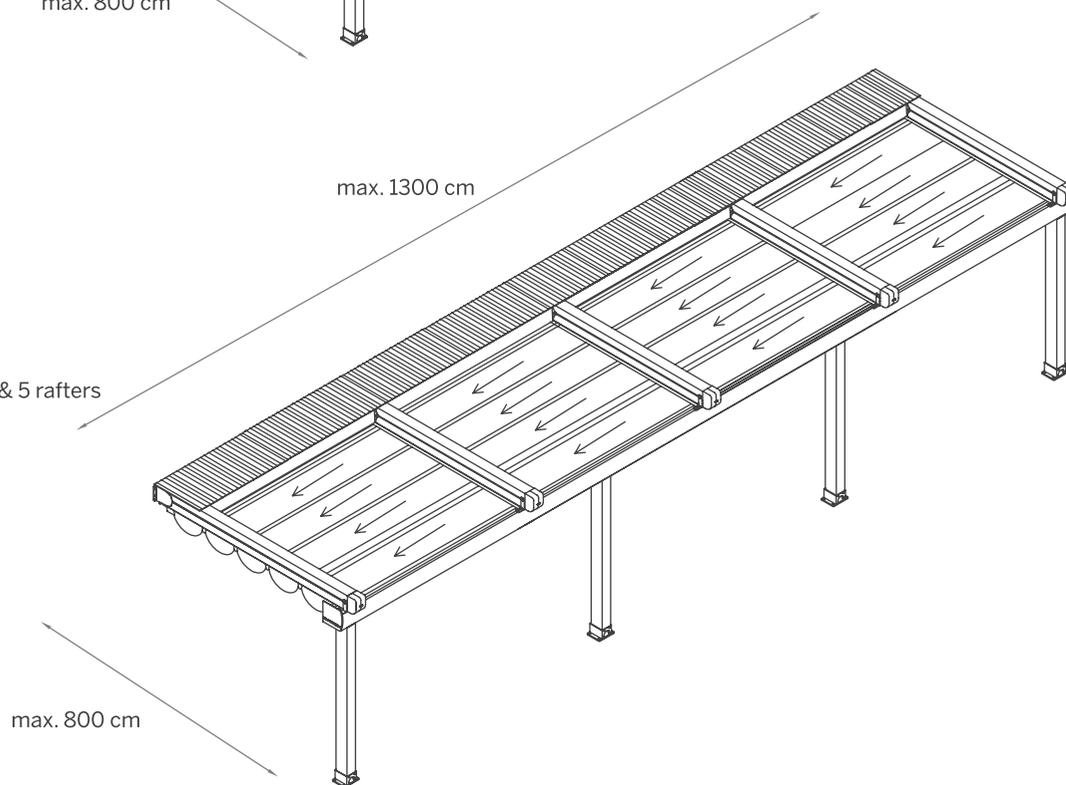

Alternating


One Module

200 cm > 350 cm
One Module with one motor & 2 rafters

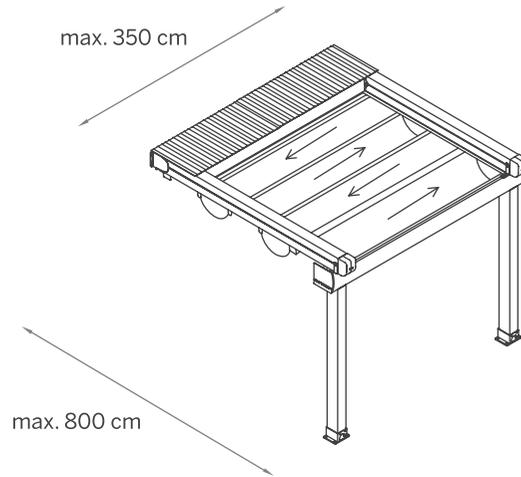


Two Modules

350 cm > 700 cm
Two Modules with one motor & 3 rafters

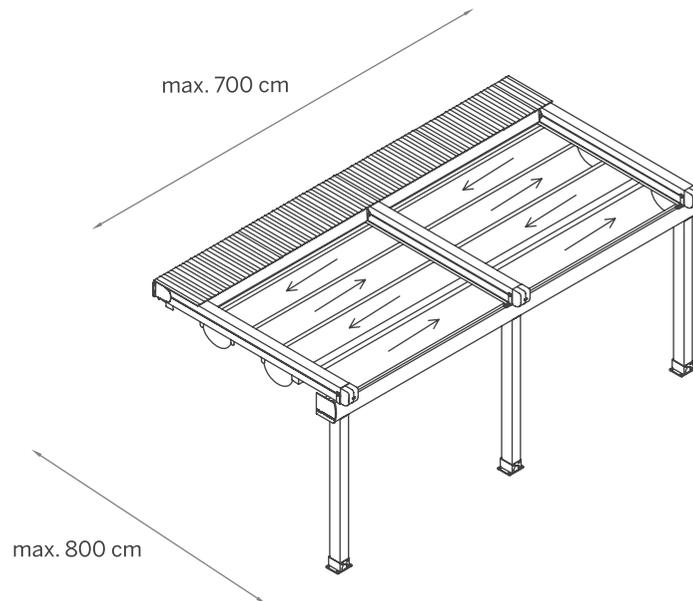




Three Modules

700 cm > 1050 cm
Three Modules with one motor & 4 rafters

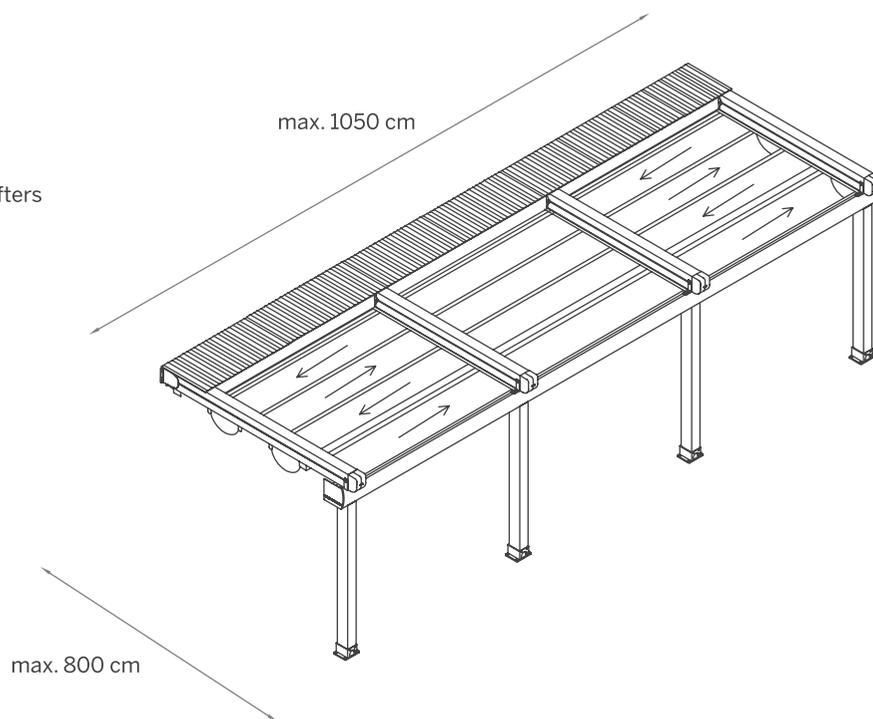
**Four Modules**

1050 cm > 1300 cm
Four Modules with one motor & 5 rafters

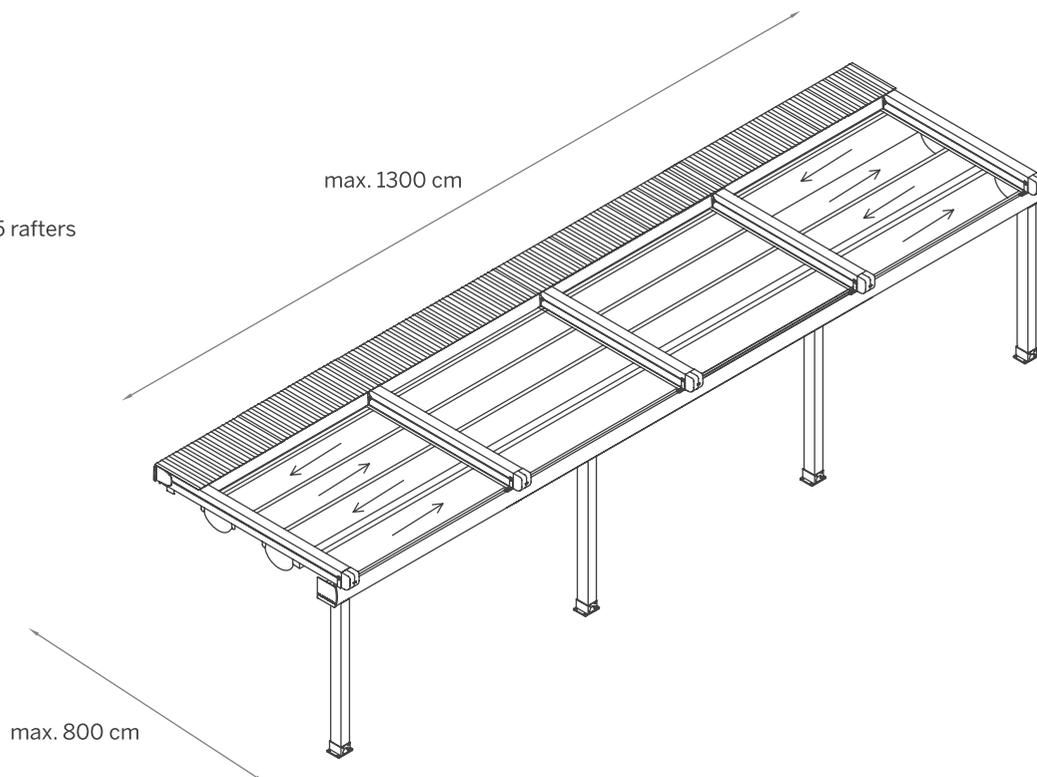


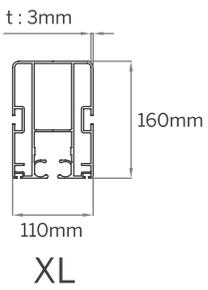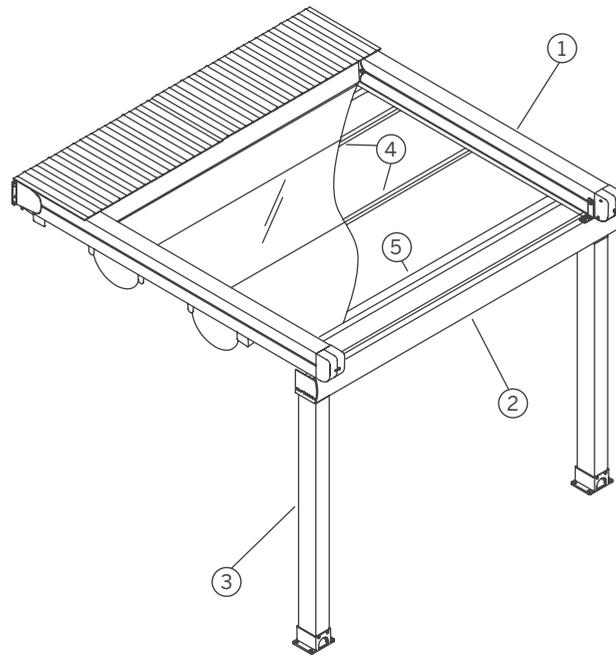


① Rafter

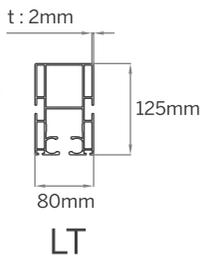


LT




② Gutter




③ Post

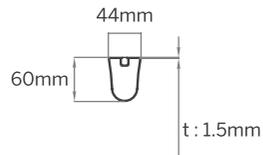


④ Fabric Support (Standart)

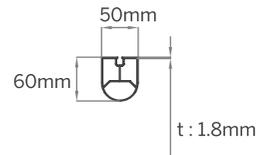


④ Fabric Support (HDD Lux)



⑤ Puller Profile (Standart)



⑤ Puller Profile (HDD Lux)

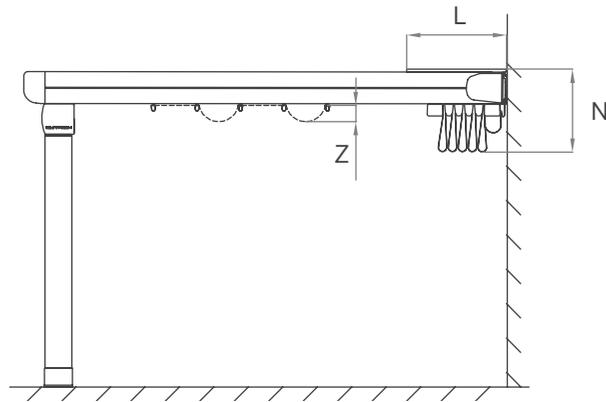


LT


	Fabric Height	Hood	Fab.Sup.Profiles	Fabric Deflection	
	(N) mm	(L) mm	pc	(Z) mm	
Projection (P) cm	300	320	638	7	130
	350	320	693	8	160
	400	320	748	9	100
	450	320	858	11	100
	500	320	913	12	100
	550	320	968	13	130
	600	320	1023	14	150

XL



	Fabric Height	Hood	Fab.Sup.Profiles	Width (W) cm	
	(N) mm	(L) mm	pc		
Projection (P) cm	300	355	633	7	
	350	355	688	8	
	400	355	743	9	
	450	355	853	11	
	500	355	908	12	
	550	355	963	13	
	600	355	1018	14	
	650	355	1073	15	
	700	355	1183	17	
	750	355	1238	18	
	800	355	1293	19	
	300				130
	350				160
	400				100
450				100	
500				100	
550				130	
600				150	
650				160	
700				160	
750				130	
800				130	
850				130	
900				130	
950				160	
1000				160	
1050				160	
1100				130	
1150				130	
1200				170	
1250				170	
1300				170	

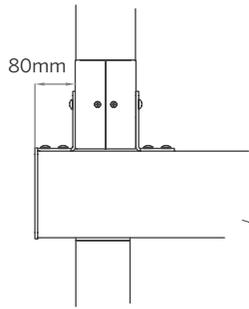


Type - A

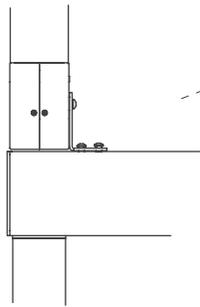






Type - B

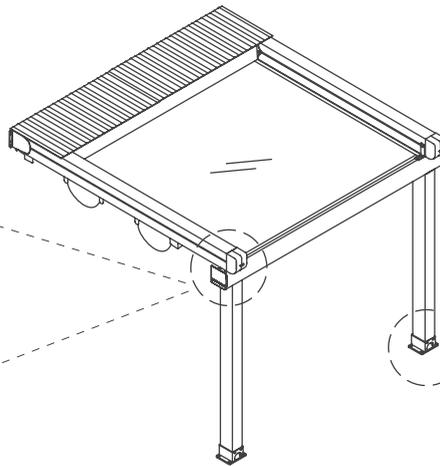


Type - A



Type - B

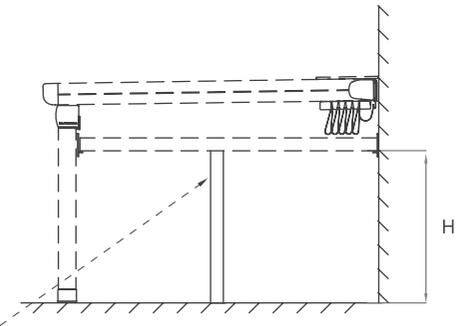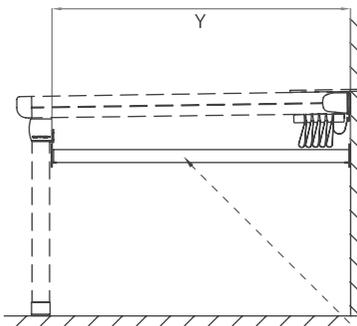
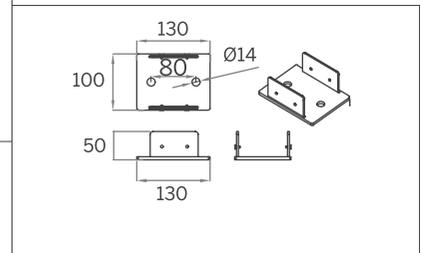
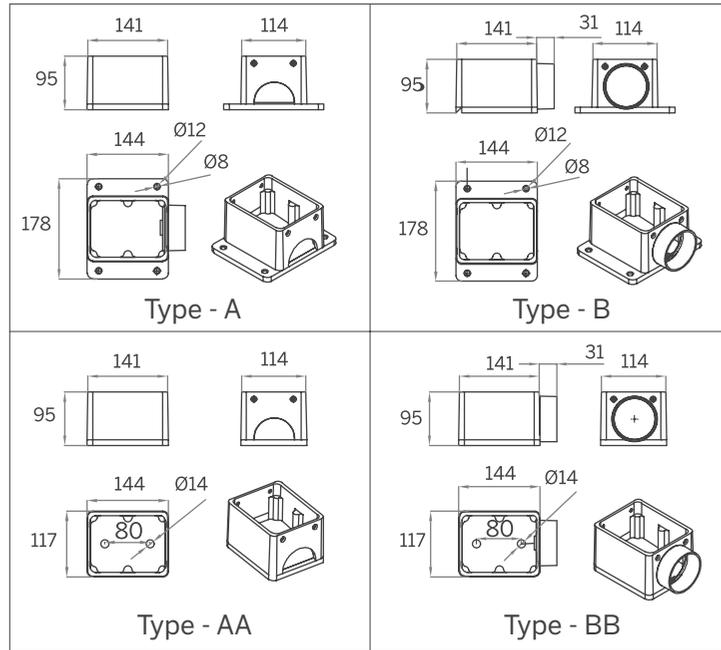


Side Rafter




Support Column of Side Rafter


Support Column of Side Rafter is installed when length of side rafter is over 800 cm

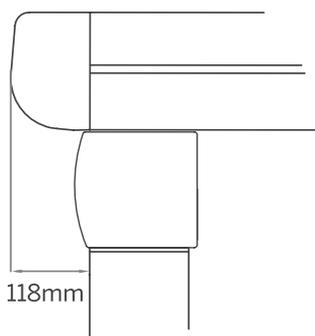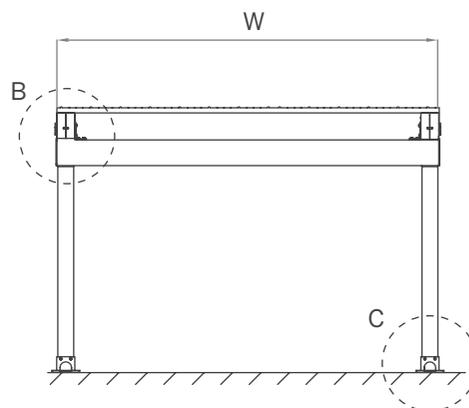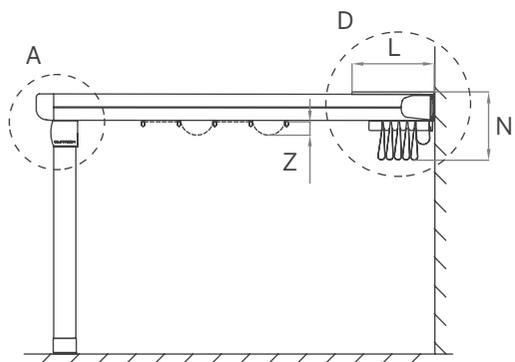


DETAIL A

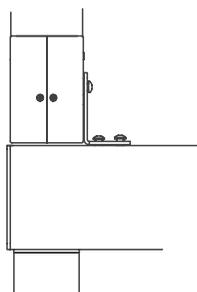


DETAIL B

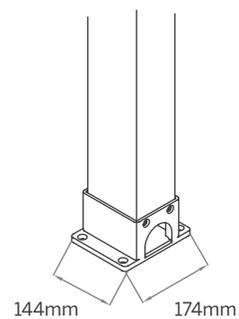


DETAIL C

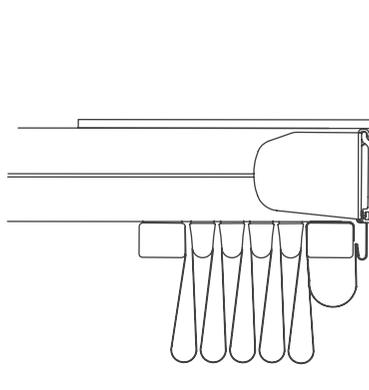

DETAIL D




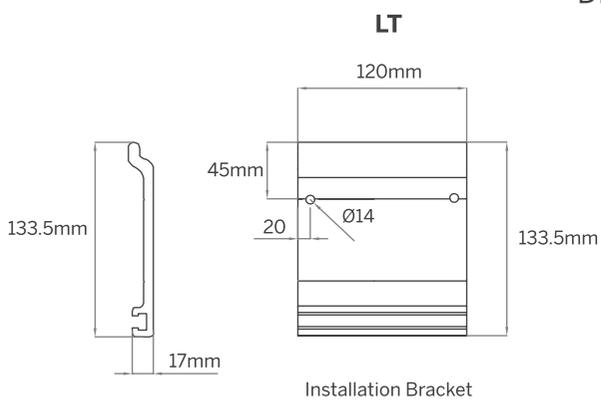


Installation Bracket




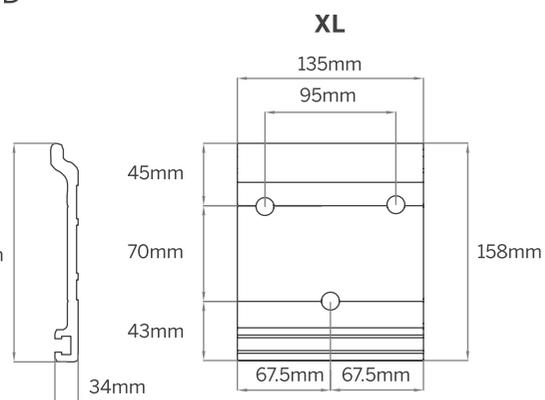



Installation Bracket

Alternating

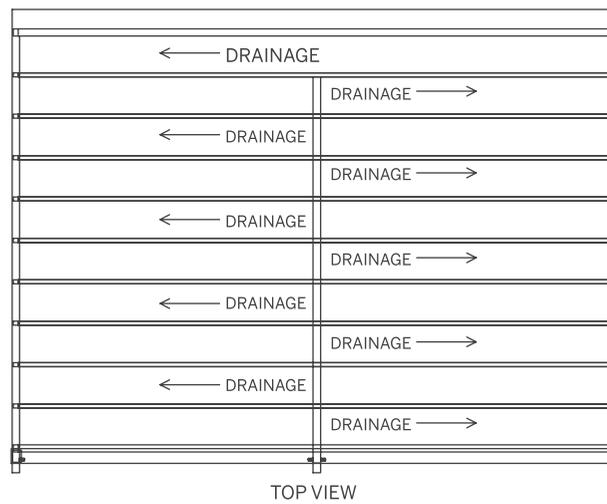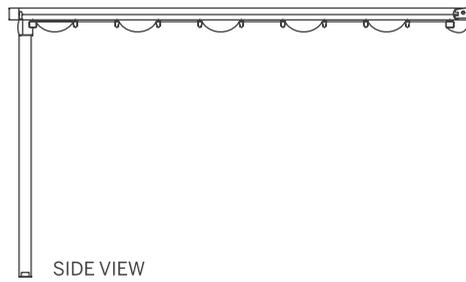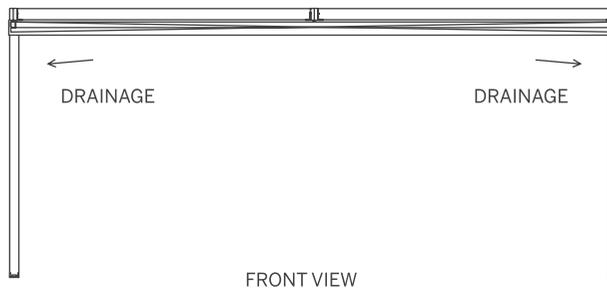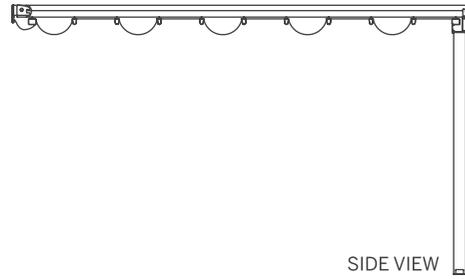


Free

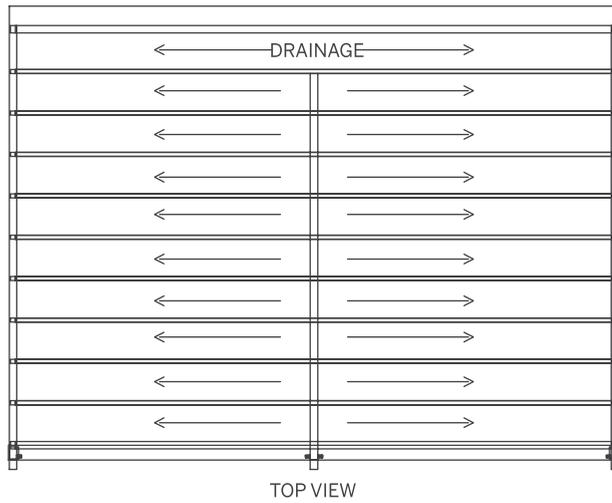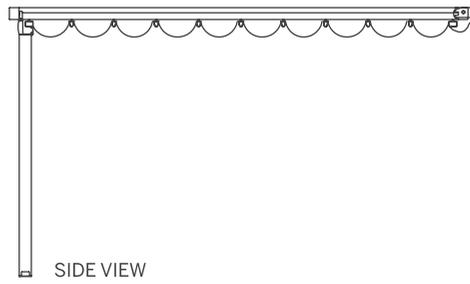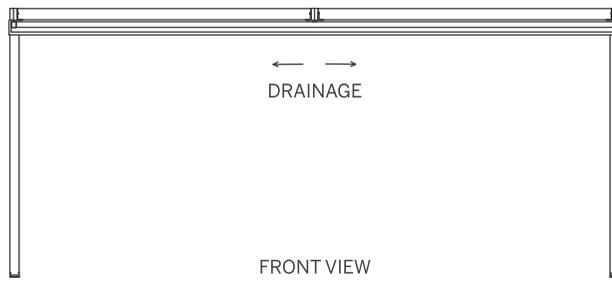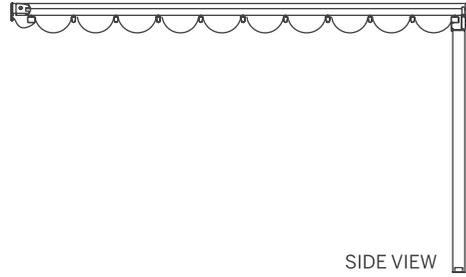




F3 Eight wheel slider

Four horizontal & four vertical rollers working together for perfectly smooth operation every time. The F3 eight wheel system is proven to remove the jamming issue that occurs with the 4 wheel system and can take loads of upto 600KG.

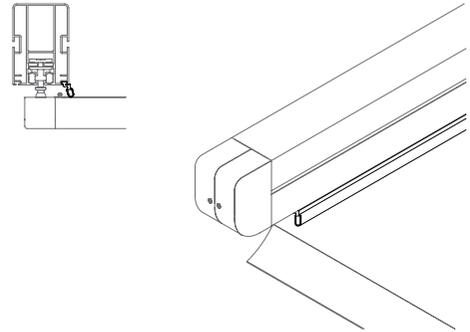


Rafter stormguard edge seal

The rafter Stormguard edge seal stops water from dripping over the side of the system by providing a soft cushioning barrier along the side of the system.

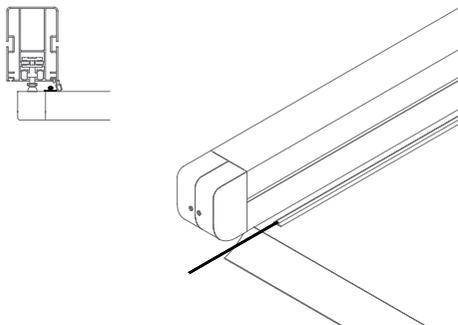


Fabric anti-drop edge cord with electrical cable

The fabric anti-drip edge cord with integrated lighting electrical cable works in conjunction with the Stormguard edge seal to prevent any water leaks over the side of the system.

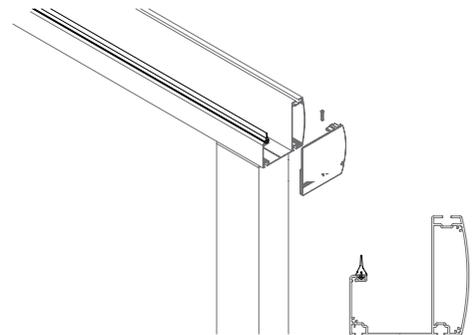


Gutter stormguard seal

The Stormguard gutter seal provides a perfect seal to prevent water leaks along the front of the system from driving rain or splashing from the gutter.

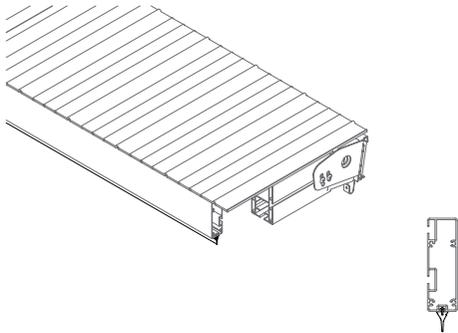


Hood stormguard seal

The Stormguard hood seal provides the perfect seal to prevent driving rain & wind coming in under the hood profiles.

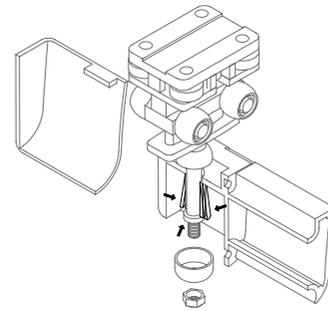


F3 slider easy clip installation

The F3 system has been designed for ease of use, to save time on installations and reduce the number of staff required. Each F3 slider can take loads of up to 600KG once in place.

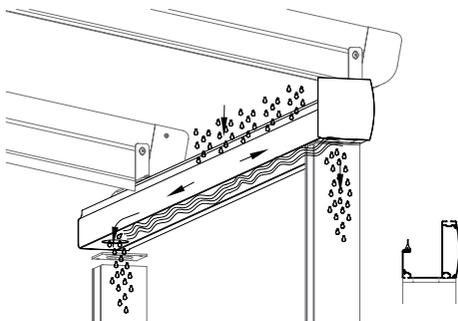


Integrated gutter & internal drainage system

The integrated gutter system provides the perfect solution for water drainage.

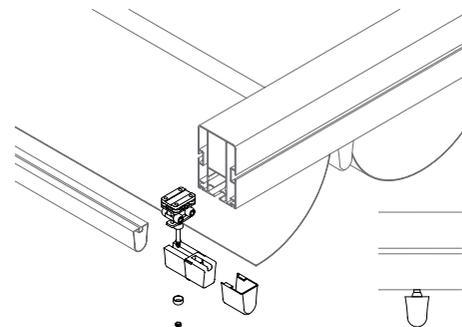


F3 slider and fabric profile assembly

The system has been designed for ease of assembly to save time on installations and reduce the number of staff required.

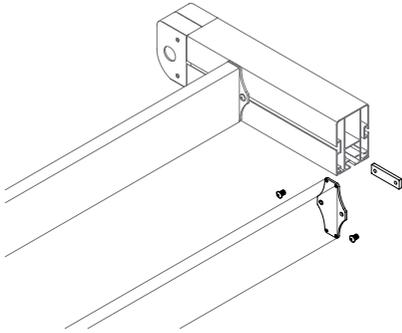


Motorbox support & hood support profile easy installation

Each support profile is easy to install and simple to adjust at the time of installation.

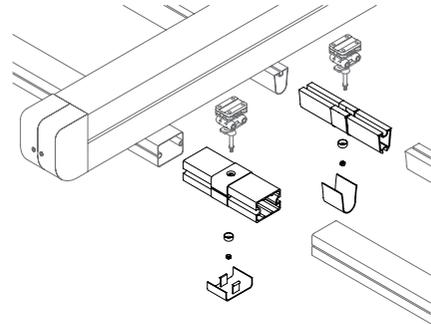


Easy clip intermediate joints (for 2 & 3 module systems)

The Easy clip intermediate joints have been designed for ease of site assembly to save time and reduce the number of staff required.

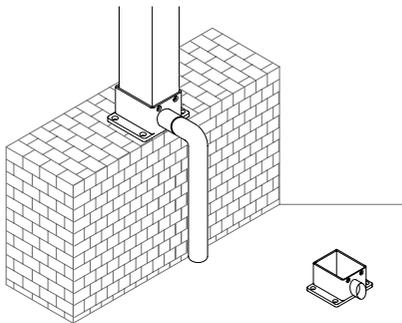


Base plate with external spout

This base plate provides a water dispersal solution.

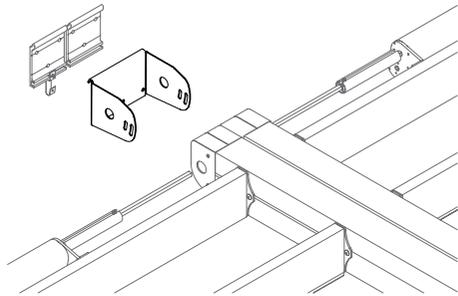


Double rafter wall bracket kit

An advanced solution for installing two rafters at once.

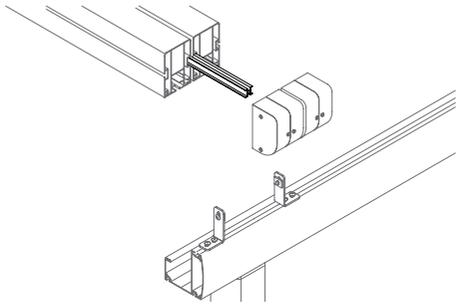


Storm channel for joining system

The storm channel is patented solution for joining two systems side by side with a waterproof join.

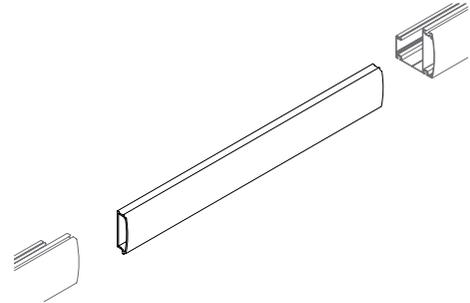


Gutter profile joining bar

A smart solution for joining the gutter profiles.




Rafter profile with side channels for easy installation

The rafter profiles are designed with functional side channels for easy installation.

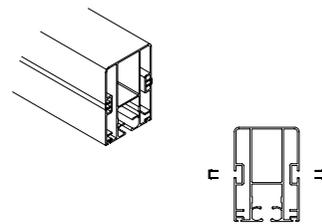


Side channel cover profile for conveyor rafters.

The cover profile is designed to complete compact view of the rafters.

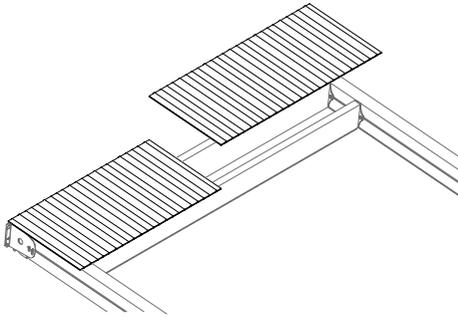


Hood profile sheets

hood profile sheets provide an attractive covering solution for the system when not in use. The low profile aesthetic design offers additional protection to the system with a chic touch.

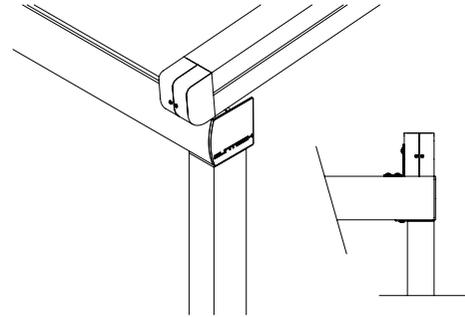


Gutter flush with rafter

Gutter solution when the system is installed next to a wall or no overhang of the gutter is required.

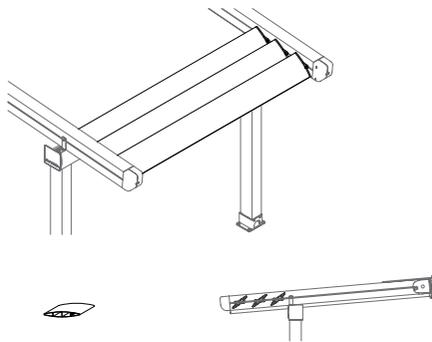


Aerofoil Louvres

The addition of Aerofoil louvres can provide added shade when the system is closed.

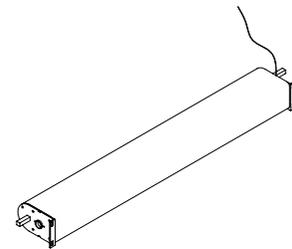


Compact 26rpm direct drive motor box

The direct drive motor system is a quick and efficient system that drives all conveyor rafters at the same time. The low profile design also allows the fabric to be stored underneath the motor which saves additional space.

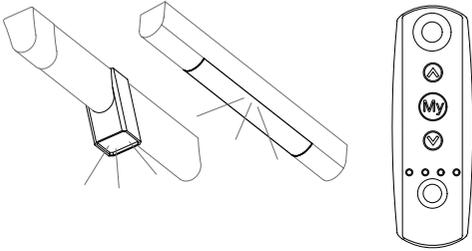


LED-TECH dimmer setup

LED-TECH dimmer lighting is an integrated lighting solution that can be added

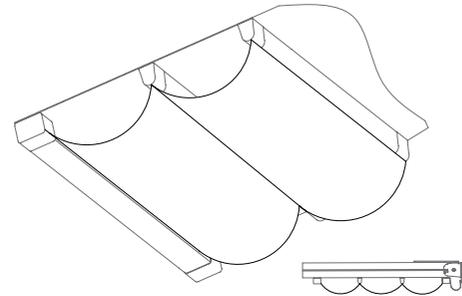

Decorative fabric under layer


The second decorative fabric under layer of fabric can provide an elegant touch of design.

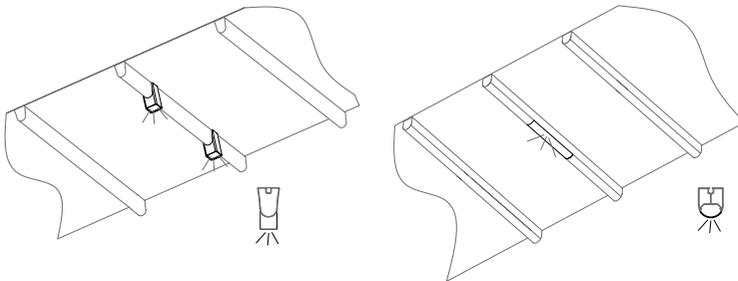


LED-TECH high powered lighting

LED-TECH lighting is an integrated lighting solution that can be added


type I



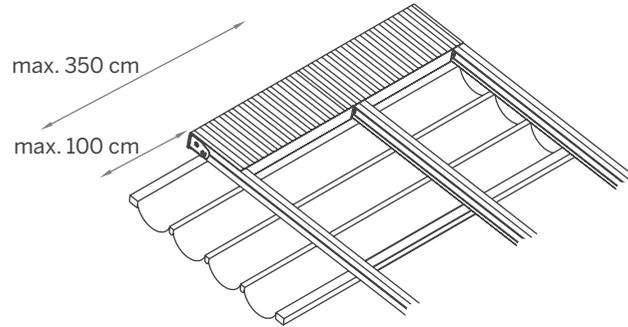


type II

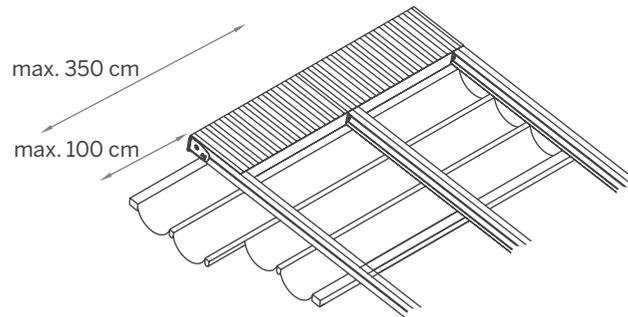

type III

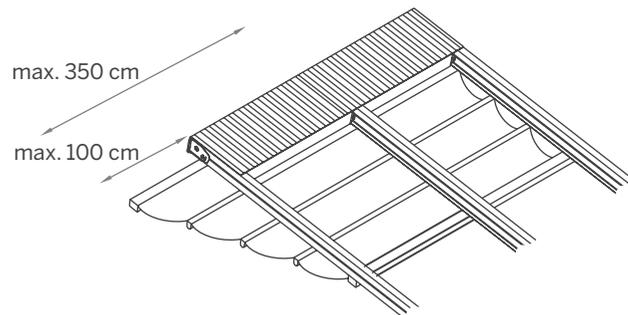


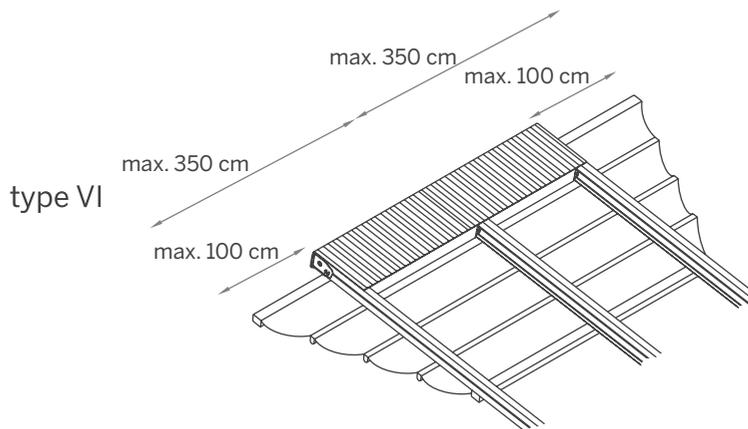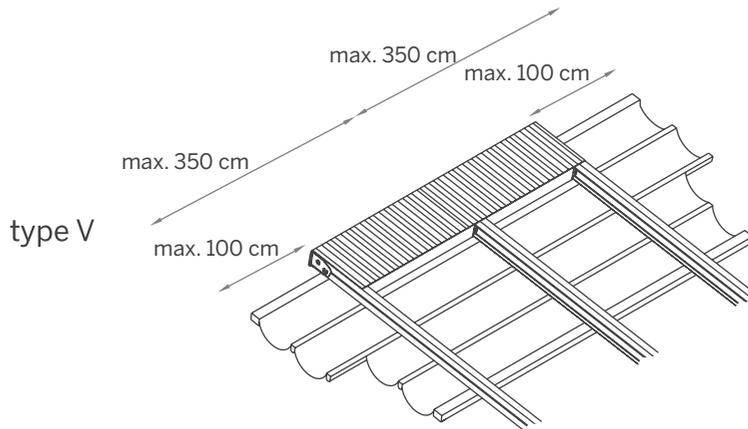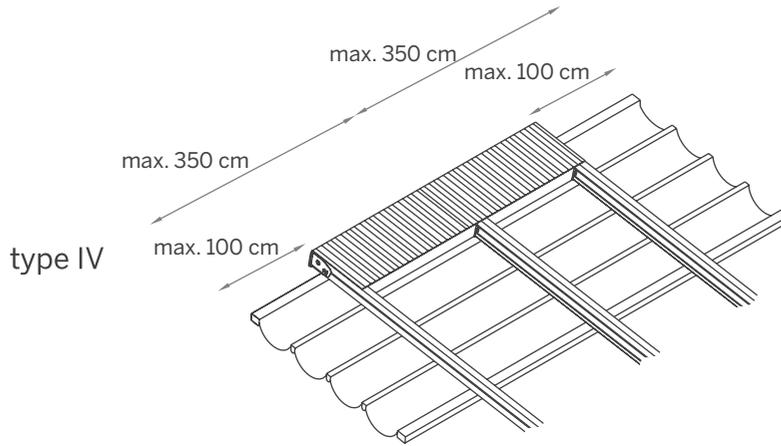

Each system is available with an optional overhang to allow the covered area to protrude past the rafter profile. Site specific overhang solutions such as stepped or wedge shapes are also an effective way to get maximum coverage for your areas.


One Module

200 cm > 350 cm
One Module with one motor & 2 rafters

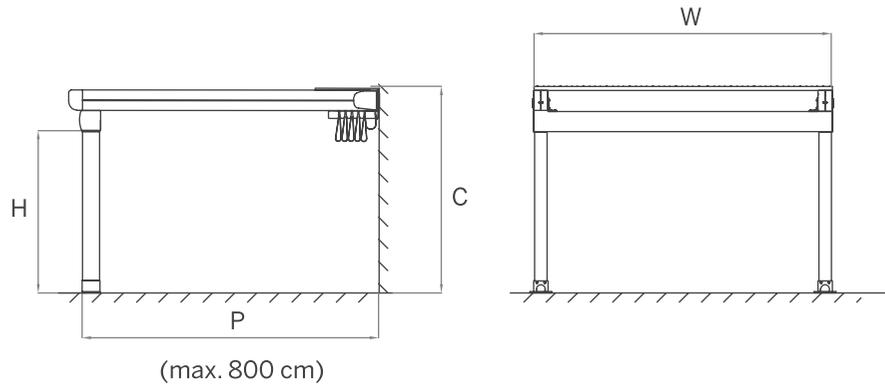


Two Modules

350 cm > 700 cm
Two Modules with one motor & 3 rafters

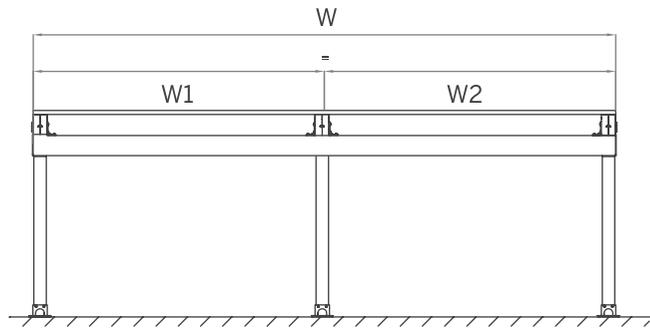


Three Modules

700 cm > 1050 cm
Three Modules with one motor & 4 rafters

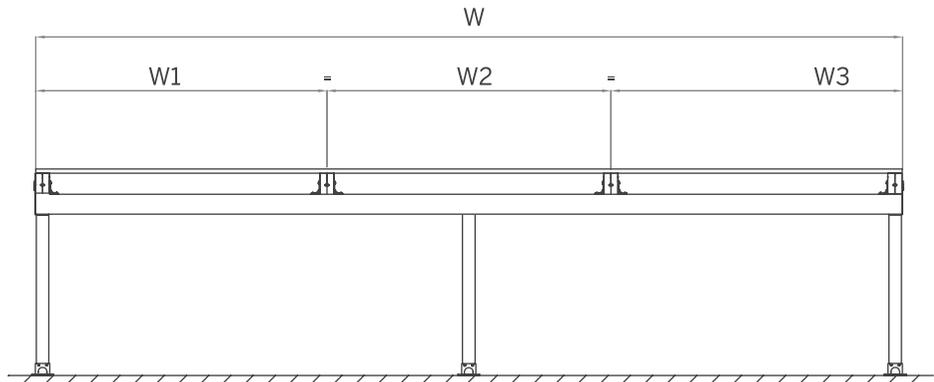

Four Modules

1050 cm > 1300 cm
Four Modules with one motor & 5 rafters

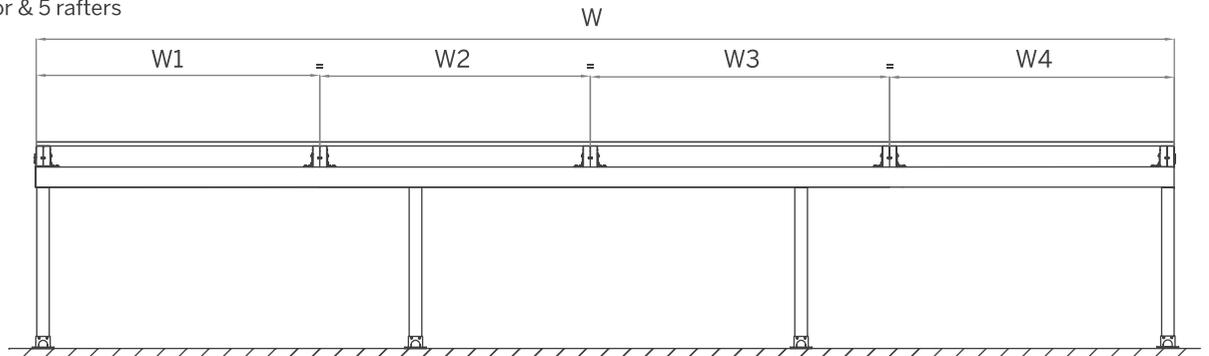

Company Name:
Order Reference:

Order Date:
Quantity:



All weather protection systems!

RETRACTABLE
AWNINGS.COM

SERIAL XL LT
WATER FLOW FREE ALTERNATING

DIMENSIONS

W - Total Width.....cm
P - Projection cm
C - Wall / Back Height..... cm
H - Front / Post Height.....cm
Total Number of Posts Required.....
(Maximum span between posts with gutter profile is 600cm)

If modules are multiple and each module is in different width, please provide details (max. width for single module is 350cm, double modules 700cm, triple modules 1050cm, four modules 1300cm)

W 1cm
W 2cm
W 3cm
W 4cm

POWDERCOAT COLORS

RAL colors	Exclusive colors	Texture colors	
<input type="checkbox"/> RAL 9016	<input type="checkbox"/> OGN35	<input type="checkbox"/> ST9010	<input type="checkbox"/> Other ...
<input type="checkbox"/> RAL 1013	<input type="checkbox"/> OS561	<input type="checkbox"/> ST9001	
<input type="checkbox"/> RAL 9006	<input type="checkbox"/> OY395	<input type="checkbox"/> ST1013	
<input type="checkbox"/> RAL 7006	<input type="checkbox"/> OGN39	<input type="checkbox"/> ST7039	
<input type="checkbox"/> RAL 7016	<input type="checkbox"/> ON617	<input type="checkbox"/> ST7016	
<input type="checkbox"/> RAL 9005	<input type="checkbox"/> ON611	<input type="checkbox"/> ST8019	

FABRIC

Basic	Semi Transparent	
<input type="checkbox"/> WT785 / White	<input type="checkbox"/> STRW22 / White	<input type="checkbox"/> Other...
<input type="checkbox"/> CR295 / Cream	<input type="checkbox"/> STRB33 / Black	
Xclusive	Matt	
<input type="checkbox"/> WTEX / White	<input type="checkbox"/> MW23 / White	
<input type="checkbox"/> CRMX / Cream	<input type="checkbox"/> MC26 / Cappuccino	
<input type="checkbox"/> GRYX / Grey		

OPTIONALS

<input type="checkbox"/> STANDARD High Power Led Lighting	<input type="checkbox"/> Additional Railpc
<input type="checkbox"/> HDD LUX High Power Led Lighting	<input type="checkbox"/> Cover Profile
<input type="checkbox"/> Dimmer Kit	<input type="checkbox"/> Supporting Steel Structure With Post
<input type="checkbox"/> Aerofoil Louvre (Line)pc	<input type="checkbox"/> Supporting Steel Structure With Post (Galvanized)
<input type="checkbox"/> Front Gutter	<input type="checkbox"/> Wall Installation Steel Beam
<input type="checkbox"/> Front Postpc	<input type="checkbox"/> Wall Installation Steel Beam (Galvanized)
<input type="checkbox"/> Side Gutter	<input type="checkbox"/> Additional Post Of Supporting Steel Structure pc
<input type="checkbox"/> Right <input type="checkbox"/> Left	<input type="checkbox"/> Additional Post Of Supp. Steel Str. (Galvanized) pc
<input type="checkbox"/> Side Rafter.....cm	<input type="checkbox"/> Side Overhang (max. 100cm per side) Type..... (I / II / III / IV / V / VI)
Quantitypc	Left Overhang:.....cm Right Overhang:.....cm
<input type="checkbox"/> Support Post of Side Rafter..... cm	<input type="checkbox"/> Storm Channel for Joining System & Double Rafter Wall
Quantitypc	Bracket Kit (for Multiple Systems)
<input type="checkbox"/> Gutter Flush with Rafter (Type B-Flush Finish)	

INSTALLATION BRACKET

Wall Bracket Ceiling Bracket

POST INSTALLATION BASE

Type A (Arch Opening) Type AA (Without Extension)
 Type B (Spout) Type BB (Without Extension)
 Type Hidden

ADDITIONAL NOTES & DRAWINGS ATTACHED